


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	08/21/15	M.F.

SKT4188

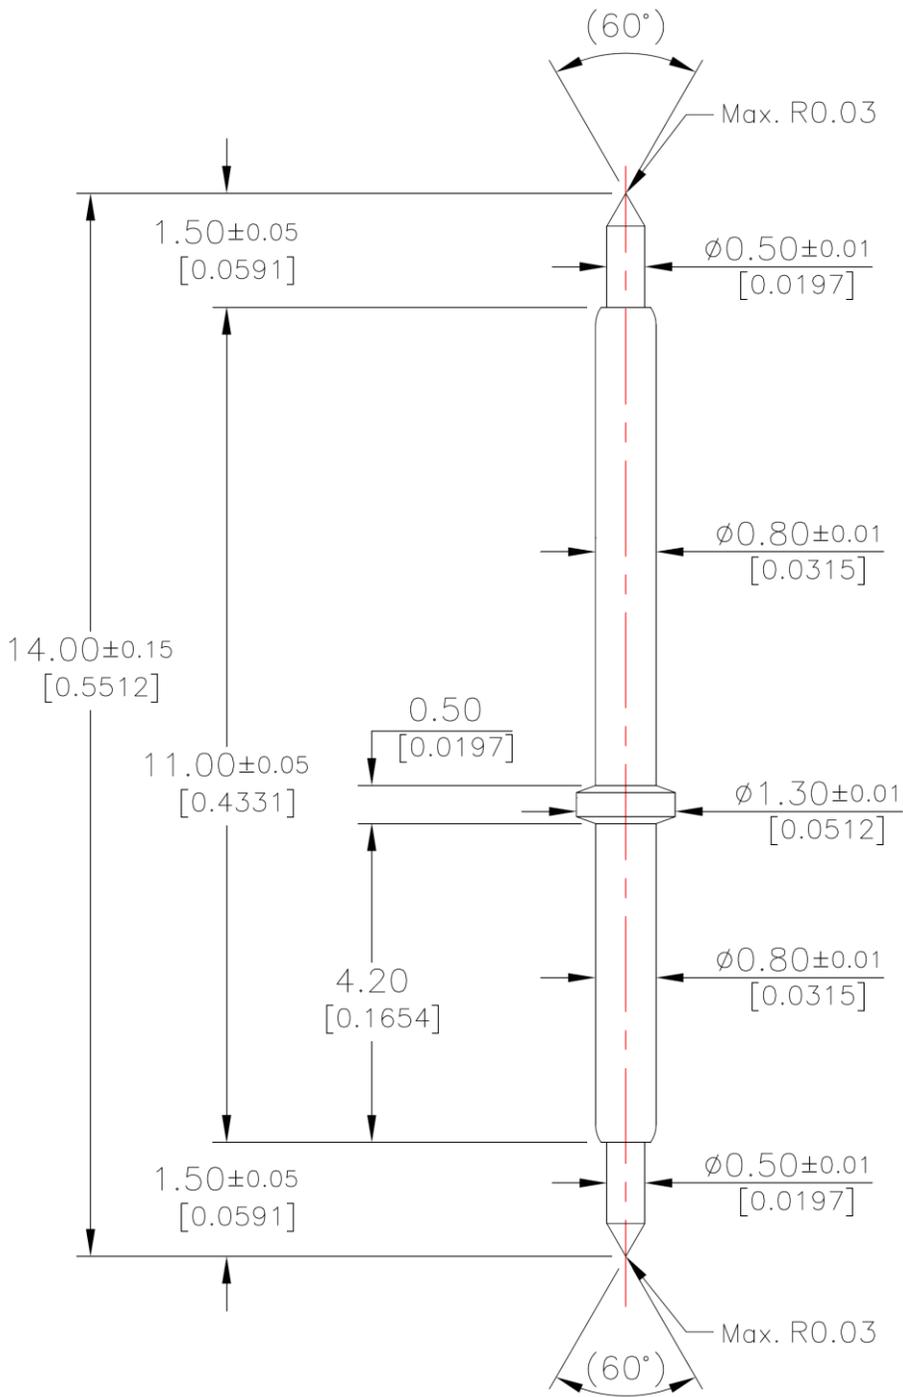

[TOP SIDE]

[BOTTOM SIDE]

Pointing Accuracy:  $\pm 0.04$  mm  
 Spring Force [+2/-1g]  
 2.9g (0.102oz) at initial travel  
 4.0g (0.141oz) at 0.50mm (0.0197") recommended travel  
 6.2g (0.217oz) at 1.50mm (0.0591") full travel

**Material & Finish**

Plunger [Top side]	Hardened Beryllium copper	/ Gold Plated
Plunger [Bottom side]	Hardened Beryllium copper	/ Gold Plated
Barrel	Brass	/ Gold Plated
Spring	Stainless Steel	/ Gold Plated

Unit: Millimeter [inch]

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED			
		<b>EMULATION TECHNOLOGY, INC.</b> VLSI and SMT ADAPTERS and ACCESSORIES	
		759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 08/21/15	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	PREPARED BY: M. FAJARDO	ITEM: POGO-PIN-14.0-1	DESCRIPTION: POGO-PIN-14.0-1
<b>DO NOT SCALE DRAWING</b>			