


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	05/27/16	RF

SKT4268

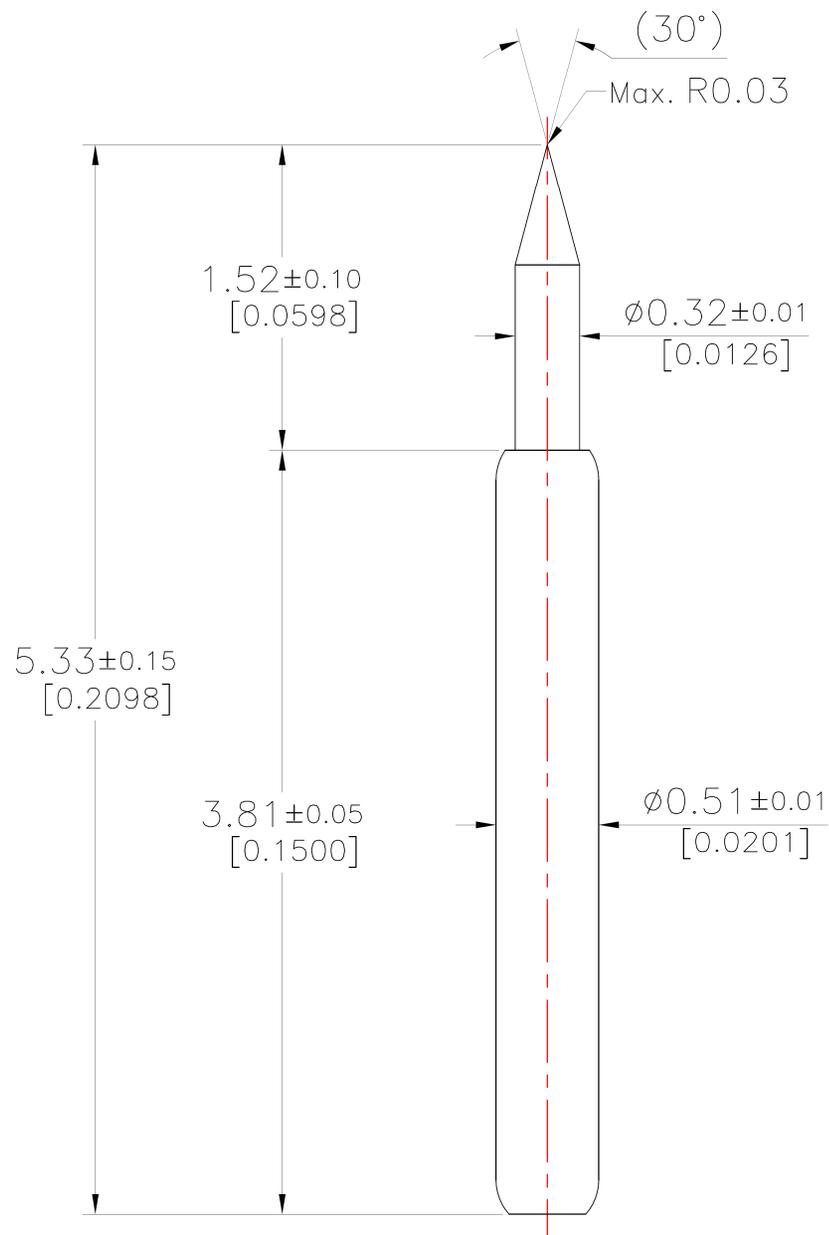

Pointing Accuracy: ± 0.05 mm

Spring Force: ± 20%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	4.6g (0.161oz)
Recommended Travel	1.01mm (0.040")	37.0g (1.305oz)
Full Travel	1.27mm (0.050")	45.4g (1.600oz)

PART	MATERIAL	FINISH
Spring	Music Wire	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Top Plunger	Hardened Steel	Palladium Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**ET** **EMULATION TECHNOLOGY, INC.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —  
 741 FLYNN ROAD TEL: (805) 383-8480  
 CAMARILLO, CA 93012 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 05/27/16	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	PREPARED BY: R. Flores	ITEM: POGO-PIN-5.33-1	DESCRIPTION: POGO-PIN-5.33-1
DO NOT SCALE DRAWING			